


4M Series Namur Type Solenoid Valve



How to Order

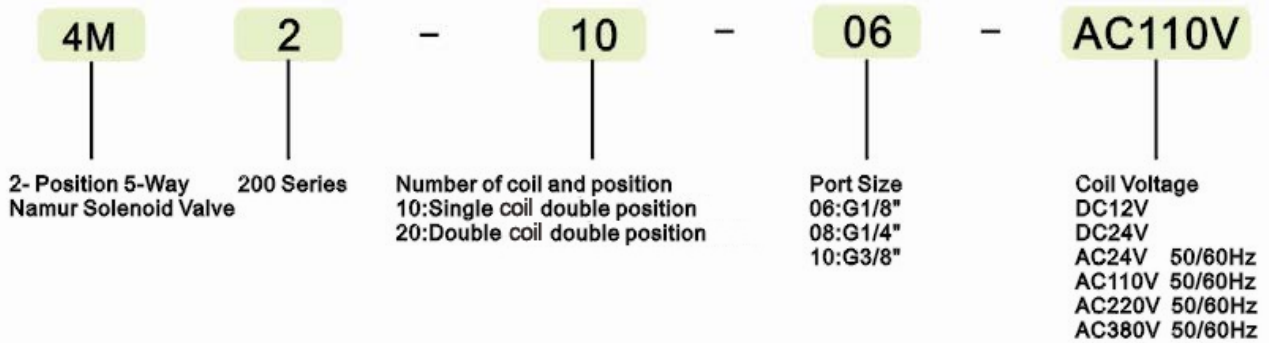


Technical data


Type	4M210-06	4M220-06	4M210-08	4M220-08	4M310-08	4M320-08	4M310-10	4M320-10
Acting type	Internally pilot-actuated							
Position number	2- Position 5- Way							
Port size(G)	1/8"		1/4"		1/4"		3/8"	
Applicable cylinders	φ40-φ63mm				φ63-φ100mm			
Fluid	Air							
Lubrication	Lubricated or not							
Operating temperature(MPa)	0.15~0.8							
Temperature range	5~60℃							
Voltage range	±10%							
Power consumption	AC:4.5VA DC:3W							

Dimensions(mm):

4M210

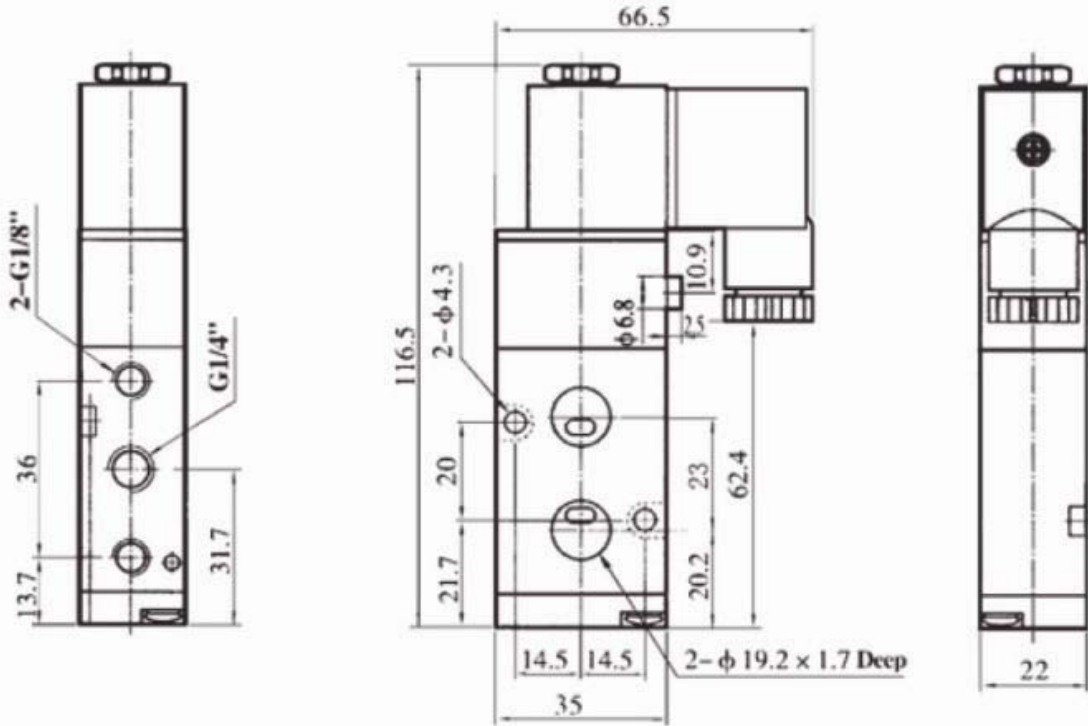


4M310

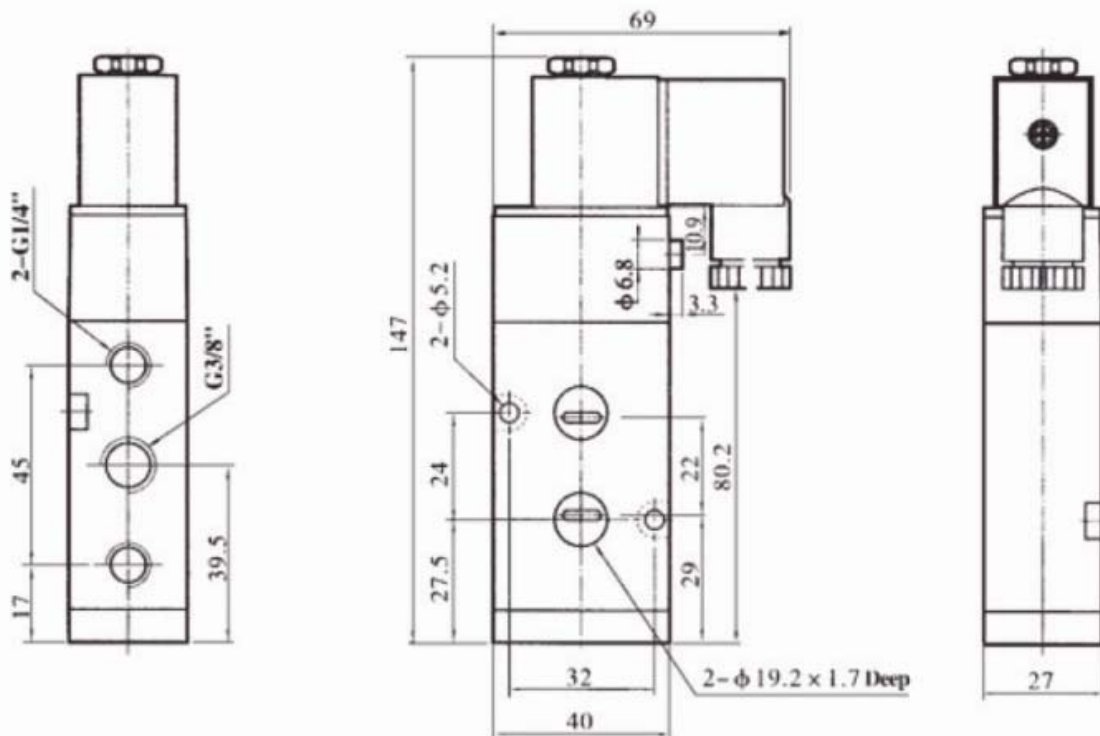

Dimensions(mm):

4M220

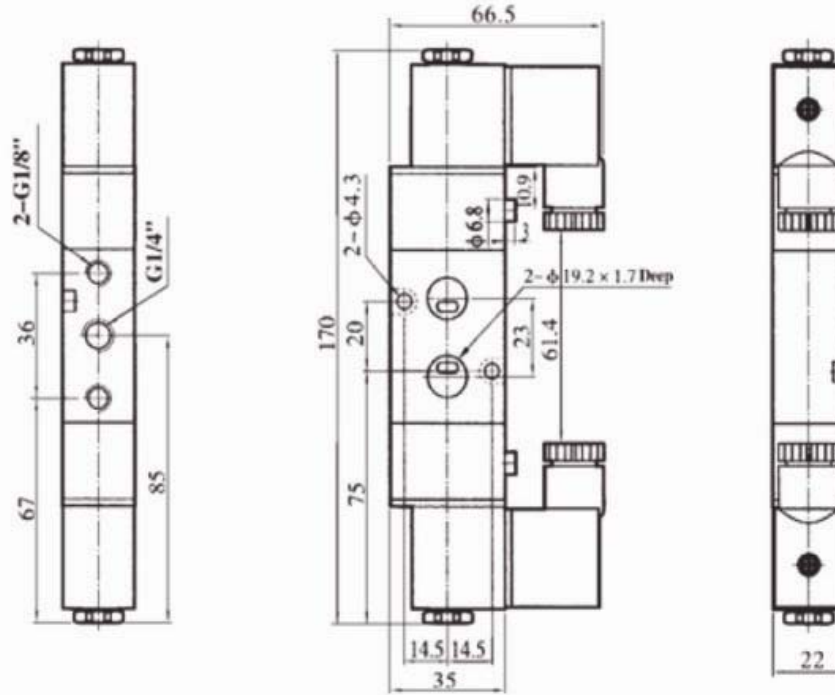

4M320

