





PNC Series ISO 15552 – VDMA 24562 – ISO6431 Cylinder



Symbol



How to order

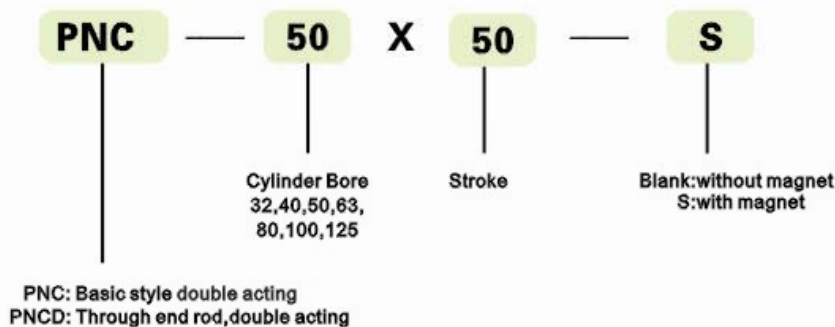

Technical data

Bore (mm)	32	40	50	63	80	100	125
Acting type	Double acting						
Working medium	Filtered air						
Operating pressure range	0.1~0.9MPa						
Max. Pressure	1.35MPa						
Operating temperature range	-5~70℃						
Operating speed range	30~800mm/s						
Cushioning type	Pneumatic adjustable cushioning						
Cushioning stroke (mm)	20mm		22mm		32mm		42mm
Port connection	G1/8	G1/4		G3/8		G1/2	

